


## COPLE DE CADENA CON CUBIERTA DE METAL



NO. PARTE	PASO CADENA	A mm	B mm	C mm	D mm	E mm	G MINIMO	G MAXIMO	Nm	PESO Kg.
KC 4012	40-2	77	72	79.4	36	36	12	22	210	1
KC 4014	40-2	84	75	79.4	36	45	12	28	300	1.4
KC 4016	40-2	92	72	87.4	40	54.5	13.5	32	380	1.8
KC 5014	50-2	101	85	99.7	45	56	14.5	35	550	2.5
KC 5016	50-2	110	87	99.7	45	64	14.5	40	725	3.2
KC 5018	50-2	122	85	99.7	45	73.5	16	45	925	4
KC 6018	60-2	147	105	123.5	56	89.5	20	55	1750	7.2
KC 6020	60-2	158	105	123.5	56	102.5	20	60	2050	9.5
KC 6022	60-2	168	117	123.5	56	115	20	75	2400	11.3
KC 8018	80-2	190	129	141.2	63	115	20	75	3800	14.7
KC 8020	80-2	210	137	145.2	65	125	20	80	4700	18.2
KC 8022	80-2	226	137	157.2	71	142	20	90	5500	2.3

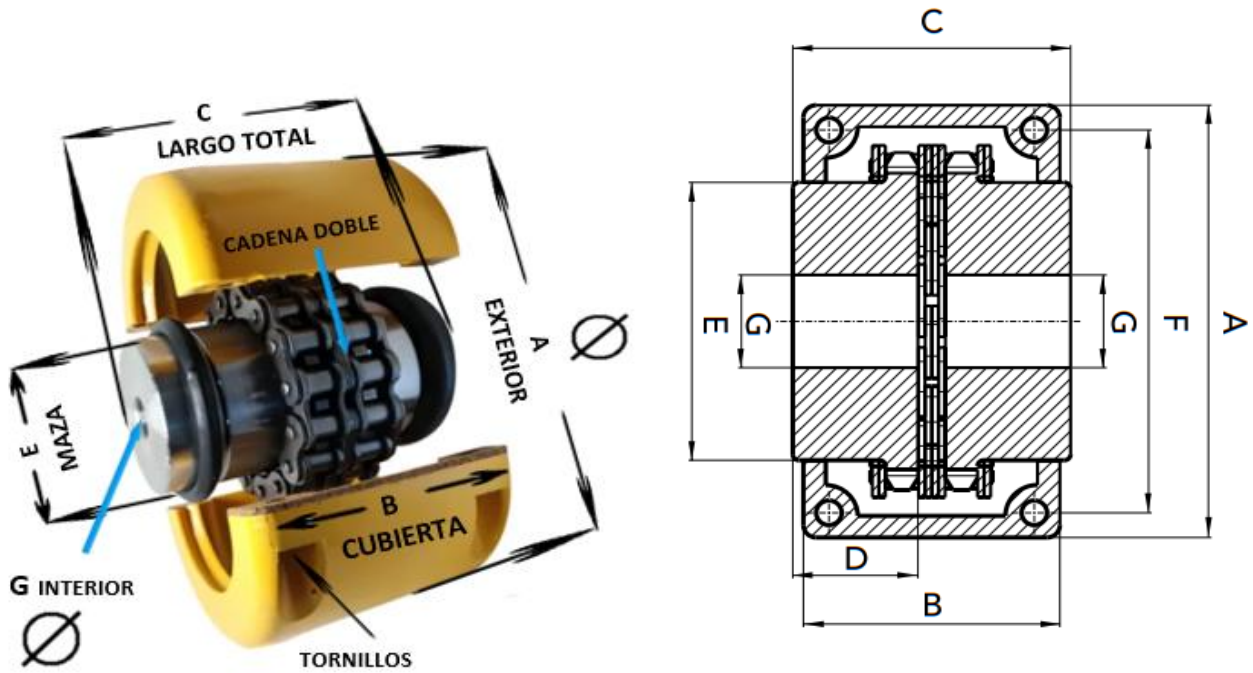