




Tecnología de cadenas de rodillos



Energía impulsiva de alta Calidad

Gran resistencia

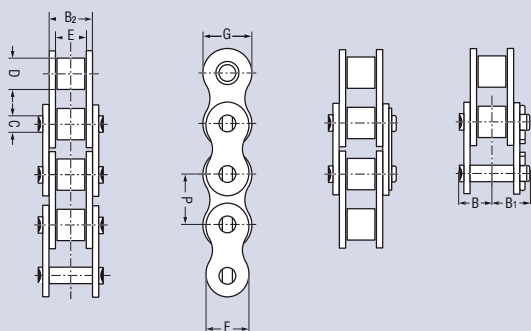


Cadena de rodillos simple ISO

niquelada

No. cadena	Paso p		Dimensiones en mm									Carga de rotura mín.	Peso q kg/m				
	ISO	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E min.	F	G			K	N	VF	VS
04 B-1 NPC		0,236	6,000	3,35	4,45	4,10	1,85	4,00	2,80	5,00	5,00	—	3000	0,133	*	*	*
05 B-1 NPC		0,315	8,000	3,91	4,71	4,77	2,31	5,00	3,00	7,10	7,10	—	5000	0,164	*	*	*
06 B-1 NPC		0,375	9,525	6,13	7,83	8,53	3,28	6,35	5,72	8,20	8,20	—	9000	0,410	*	*	*
08 B-1 NPC		0,500	12,700	8,24	10,33	11,30	4,45	8,51	7,75	10,92	11,80	—	18000	0,660	*	*	*
10 B-1 NPC		0,625	15,875	9,80	12,25	13,28	5,08	10,16	9,65	13,72	14,70	—	22400	0,920	*	*	*
12 B-1 NPC		0,750	19,050	11,35	14,57	15,62	5,72	12,07	11,68	16,10	16,10	—	29000	1,210	*	*	*
16 B-1 NPC		1,000	25,400	18,05	21,11	25,45	8,28	15,88	17,02	21,00	21,00	—	60000	2,660	*	*	*

Para las cadenas dobles véase la página 22

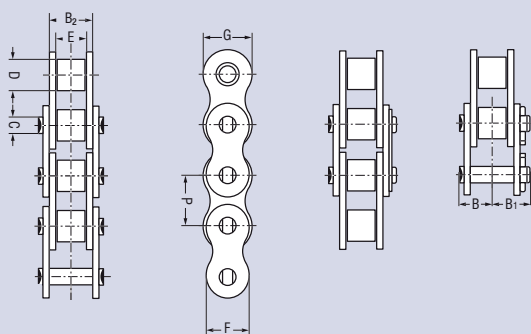


Cadena de rodillos simple ANSI

resistente a la corrosión

No. cadena	Paso p		Dimensiones en mm									Carga de rotura mín.	Peso q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E min.	F	G			K	N	VF	VS
25-1 SS		0,250	6,350	3,91	4,71	4,80	2,32	3,30	3,18	5,01	5,81	—	3000	0,130	*	*	*
35-1 SS		0,375	9,525	5,89	7,69	7,46	3,59	5,08	4,78	7,80	9,04	—	7000	0,320	*	*	*
40-1 SS		0,500	12,700	8,22	10,32	11,17	3,98	7,92	7,92	10,40	12,06	—	12500	0,620	*	*	*
50-1 SS		0,625	15,875	10,15	12,40	13,84	5,09	10,16	9,52	13,01	15,08	—	22500	1,010	*	*	*
60-1 SS		0,750	19,050	12,72	15,27	17,75	5,96	11,91	12,70	15,64	18,09	—	30000	1,450	*	*	*
80-1 SS		1,000	25,400	16,50	19,85	22,60	7,94	15,87	15,88	20,82	24,13	—	48000	2,550	*	*	*


Para cadenas dobles y triples véase página 23.

* = Las piezas de conexión están disponibles.

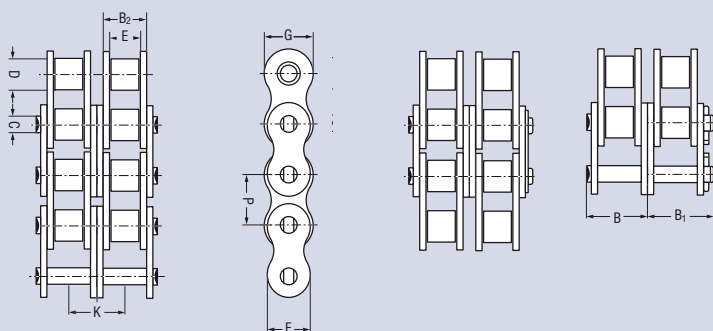

Cadena de rodillos simple ANSI serie H

No. cadena	Paso p		Dimensiones en mm									Carga de rotura mín. N	Peso q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E mín.	F	G			K	VF	VS	GG
25-2 SS		0,250	6,350	7,11	7,91	4,80	2,32	3,30	3,18	5,01	5,81	6,40	6 000	0,250	*	*	*
35-2 SS		0,375	9,525	11,21	12,61	7,46	3,59	5,08	4,78	7,80	9,04	10,13	14000	0,630	*	*	*
40-2 SS		0,500	12,700	15,45	17,53	11,17	3,98	7,92	7,92	10,41	12,06	14,38	25000	1,220	*	*	*
50-2 SS		0,625	15,875	19,18	21,58	13,84	5,09	10,16	9,52	13,01	15,08	18,11	45000	2,000	*	*	*
60-2 SS		0,750	19,050	24,10	26,80	17,75	5,96	11,91	12,70	15,64	18,09	22,78	60000	2,870	*	*	*
80-2 SS		1,000	25,400	31,10	35,20	22,60	7,94	15,87	15,88	20,82	24,13	29,29	96000	5,050	*	*	*



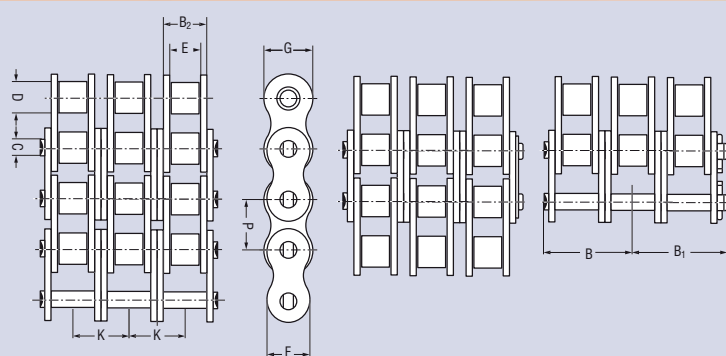


Cadena de rodillos triple ANSI resistente a la corrosión




No. cadena	Paso p		Dimensiones en mm									Carga de rotura mín. N	Peso q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E min.	F	G			K	VF	VS	GG
25-3 SS		0,250	6,350	10,53	11,33	4,80	2,32	3,30	3,18	5,01	5,81	6,40	9000	0,370	*	*	*
35-3 SS		0,375	9,525	16,09	17,89	7,46	3,59	5,08	4,78	7,80	9,04	10,13	21000	0,940	*	*	*
40-3 SS		0,500	12,700	22,60	24,76	11,17	3,98	7,92	7,92	10,41	12,06	14,38	37500	1,820	*	*	*
50-3 SS		0,625	15,875	28,28	31,03	13,84	5,09	10,16	9,52	13,01	15,08	18,11	67500	2,980	*	*	*
60-3 SS		0,750	19,050	35,55	38,25	17,75	5,96	11,91	12,70	15,64	18,09	22,78	90000	4,280	*	*	*
80-3 SS		1,000	25,400	45,70	49,90	22,60	7,94	15,87	15,88	20,82	24,13	29,29	144000	7,540	*	*	*

* = Las piezas de conexión están disponibles.




Componentes de cadena Link-Belt






**Eslabón de unión
de clip**






**Eslabón de unión
con pasador**



**Eslabón exterior
remachado**



**Eslabón acodado
doble**



**Eslabón acodado
con pasador**

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS