

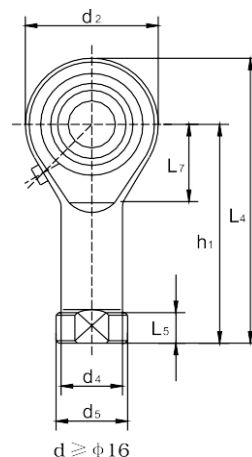


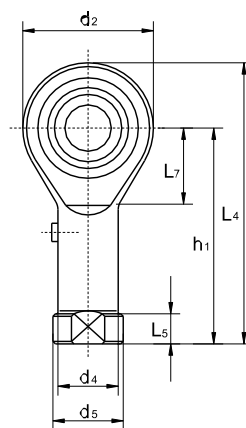

ROTULA PHS HEMBRA MILIMETRICA ACERO AL CARBON

MARCA ECONOMIC

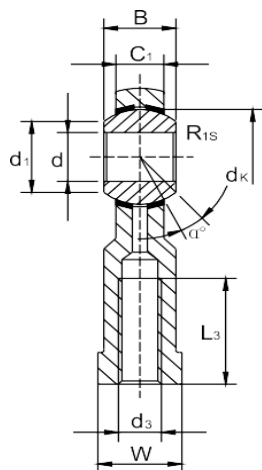

R= RIGTH (CUERDA DERECHA)

L= LEFT (CUERDA IZQUIERDA)

Capacidad de carga
(K N)

MODELO	DIMENSIONES EN MILIMETROS																	
	d	d ₃	B	C ₁	W	L ₃	d ₂	L ₄	h ₁	L ₅	d ₄	d ₅	d _k	d ₁	α	dyn.	stat.	peso
	6H					min									≈	C	C ₀	Kg≈
PHS 5R	5	M5 × 0.8	8	6	9	10	16	35	27	4	8.5	11	11.11	7.70	13	3.25	5.70	0.016
PHS 5L	5	M5 × 0.8	8	6	9	10	16	35	27	4	8.5	11	11.11	7.70	13	3.25	5.70	0.016
PHS 6R	6	M6 × 1.0	9	6.75	11	12	18	39	30	5	10.0	13	12.70	8.96	13	4.30	7.20	0.022
PHS 6L	6	M6 × 1.0	9	6.75	11	12	18	39	30	5	10.0	13	12.70	8.96	13	4.30	7.20	0.022
PHS 8R	8	M8 × 1.25	12	9	14	16	22	47	36	5	12.5	16	15.875	10.4	14	7.20	11.6	0.047
PHS 8L	8	M8 × 1.25	12	9	14	16	22	47	36	5	12.5	16	15.875	10.4	14	7.20	11.6	0.047
PHS 10R	10	M10 × 1.5	14	10.5	17	20	26	56	43	6.5	15.0	19	19.05	12.9	13	10.0	14.5	0.077
PHS 10L	10	M10 × 1.5	14	10.5	17	20	26	56	43	6.5	15.0	19	19.05	12.9	13	10.0	14.5	0.077
PHS 12R	12	M12 × 1.75	16	12	19	22	30	65	50	6.5	17.5	22	22.225	15.4	13	13.4	17.0	0.10
PHS 12L	12	M12 × 1.75	16	12	19	22	30	65	50	6.5	17.5	22	22.225	15.4	13	13.4	17.0	0.10
PHS 14R	14	M14 × 2.0	19	13.5	22	25	34	74	57	8	20.0	25	25.40	16.9	16	17.0	24.0	0.16
PHS 14L	14	M14 × 2.0	19	13.5	22	25	34	74	57	8	20.0	25	25.40	16.9	16	17.0	24.0	0.16
PHS 16R	16	M16 × 2.0	21	15	24	28	40	84	64	8	22.0	27	28.575	19.4	15	21.6	28.5	0.22
PHS 16L	16	M16 × 2.0	21	15	24	28	40	84	64	8	22.0	27	28.575	19.4	15	21.6	28.5	0.22
PHS 18R	18	M18 × 1.5	23	16.5	27	32	44	93	71	10	25.0	31	31.75	21.9	15	26.0	42.5	0.32
PHS 18L	18	M18 × 1.5	23	16.5	27	32	44	93	71	10	25.0	31	31.75	21.9	15	26.0	42.5	0.32
PHS 20R	20	M20 × 1.5	25	18	30	33	50	102	77	10	27.5	34	34.925	24.4	14	31.5	42.5	0.42
PHS 20L	20	M20 × 1.5	25	18	30	33	50	102	77	10	27.5	34	34.925	24.4	14	31.5	42.5	0.42

***** Verifique bien el tipo de cuerda de su rotula ya que según la marca puede variar el paso del roscado*****