



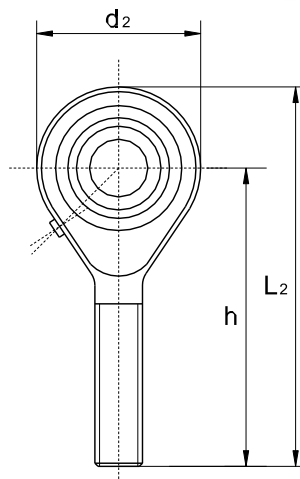

ROTULA POS MACHO MILIMETRICA

ACERO AL CARBON

MARCA ECONOMIC

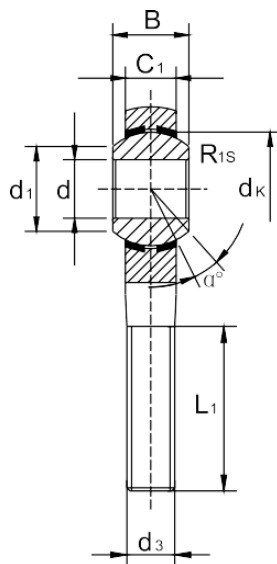

R= RIGTH (CUERDA DERECHA)

L= LEFT (CUERDA IZQUIERDA)

DIMENSIONES EN MILIMETROS

Capacidad de carga
K N

MODELO	d	d3	B	C ₁	L ₁	d ₂	h	L ₂	d _k	R _{1S}	d ₁	α	dyn.	stat.	Peso
		6g			min							≈	C	C ₀	Kg≈
POS 5R	5	M5 × 0.8	8	6	20	16	33	41	11.11	0.3	7.70	13	3.25	5.70	0.013
POS 5L	5	M5 × 0.8	8	6	20	16	33	41	11.11	0.3	7.70	13	3.25	5.70	0.013
POS 6R	6	M6 × 1.0	9	6.75	22	18	36	45	12.70	0.3	8.96	13	4.30	7.20	0.020
POS 6L	6	M6 × 1.0	9	6.75	22	18	36	45	12.70	0.3	8.96	13	4.30	7.20	0.020
POS 8R	8	M8 × 1.25	12	9	25	22	42	53	15.875	0.3	10.4	14	7.20	11.6	0.030
POS 8L	8	M8 × 1.25	12	9	25	22	42	53	15.875	0.3	10.4	14	7.20	11.6	0.030
POS 10R	10	M10 × 1.5	14	10.5	29	26	48	61	19.05	0.3	12.9	13	10.0	14.5	0.055
POS 10L	10	M10 × 1.5	14	10.5	29	26	48	61	19.05	0.3	12.9	13	10.0	14.5	0.055
POS-12R	12	M12 × 1.75	16	12.0	33	30	54	69	22.23	0.3	15.4	13	13.4	17.0	0.085
POS-12L	12	M12 × 1.75	16	12.0	33	30	54	69	22.23	0.3	15.4	13	14.4	17.0	0.085
POS 14R	14	M14 × 2.0	19	13.5	36	34	60	77	25.40	0.3	16.9	16	17.0	24.0	0.14
POS 14L	14	M14 × 2.0	19	13.5	36	34	60	77	25.40	0.3	16.9	16	17.0	24.0	0.14
POS 16R	16	M16 × 2.0	21	15	40	40	66	86	28.575	0.3	19.4	15	21.6	28.5	0.21
POS 16L	16	M16 × 2.0	21	15	40	40	66	86	28.575	0.3	19.4	15	21.6	28.5	0.21
POS 18R	18	M18 × 1.5	23	16.5	44	44	72	94	31.75	0.3	21.9	15	26.0	42.5	0.28
POS 18L	18	M18 × 1.5	23	16.5	44	44	72	94	31.75	0.3	21.9	15	26.0	42.5	0.28
POS 20R	20	M20 × 1.5	25	18	47	50	78	103	34.925	0.3	24.4	14	31.5	52.5	0.38
POS 20L	20	M20 × 1.5	25	18	47	50	78	103	34.925	0.3	24.4	14	31.5	52.5	0.38

*** Verifique bien el tipo de cuerda de su rotula ya que según la marca puede variar el paso del roscado***