




CHUMACERA TENSORA INOXIDABLE SSUCT2 CAJA Y RODAMIENTO ACERO INOXIDABLE 304



BALERO ACERO
INOXIDABLE SSUC2

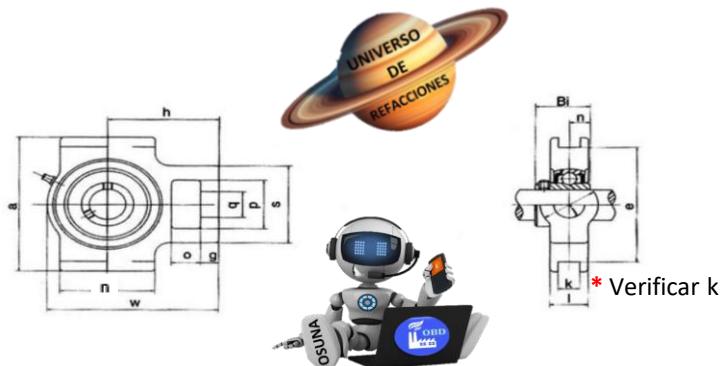

Soportes No.	d		Dimensiones															Rodamiento No.	Caja No.	Peso (kg)			
			*																				
	in	mm	o	g	s	p	q	n	k	e	a	w	j	i	h	b	Bi						
SSUCT 201 201-8	1/2	12	16	10	51	32	19	51	12	76	89	94	32	21	61	11,5	27,4	SSUC 201 201-8	T201	0,79			
SSUCT 202 202-10	5/8	15	16	10	51	32	19	51	12	76	89	94	32	21	61	11,5	27,4	SSUC 202 202-10	T202	0,78			
SSUCT 203 203-11	11/16	17	16	10	51	32	19	51	12	76	89	94	32	21	61	11,5	27,4	SSUC 203 203-11	T203	0,77			
SSUCT 204 204-12	3/4	20	16	10	51	32	19	51	12	76	89	94	32	21	61	12,3	31,4	SSUC 204 204-12	T204	0,81			
SSUCT 205 205-15	7/8	20	16	10	51	32	19	51	12	76	89	97	32	24	62	14,3	34,1	SSUC 205 205-15	T205	0,92			
SSUCT 205 205-16	15/16	25	16	10	56	37	22	57	12	89	102	113	37	28	70	15,9	38,1	SSUC 205 205-16	T206	1,01			
SSUCT 206 206-18	1-1/8	30	16	10	56	37	22	57	12	89	102	113	37	28	70	15,9	38,1	SSUC 206-19 206-20					
SSUCT 206-19 206-20	1-3/16		16	13	64	37	22	64	12	89	102	129	37	30	78	17,5	42,9	SSUC 206-19 206-20	T207	1,70			
SSUCT 207-20 207-21	1-1/4		16	13	64	37	22	64	12	89	102	129	37	30	78	17,5	42,9	SSUC 207-20 207-21					
SSUCT 207-22 207	1-5/16		16	13	64	37	22	64	12	89	102	129	37	30	78	17,5	42,9	SSUC 207-22 207					
SSUCT 207-23 207-24	1-3/8		16	13	64	37	22	64	12	89	102	129	37	30	78	17,5	42,9	SSUC 207-23 207-24					
SSUCT 208-24 208-25	1-7/16		19	16	83	49	29	83	16	102	114	144	49	33	88	19,0	49,2	SSUC 208-24 208-25	T208	2,43			
SSUCT 208-25 208	1-1/2		19	16	83	49	29	83	16	102	117	144	49	35	87	19,0	49,2	SSUC 208-25 208					
SSUCT 208-26 209-27	1-9/16		19	16	83	49	29	83	16	102	117	144	49	35	87	19,0	49,2	SSUC 208-26 209-27	T209	2,58			
SSUCT 209-28 209-29	1-5/8		19	16	83	49	29	83	16	102	117	144	49	35	87	19,0	49,2	SSUC 209-28 209-29					
SSUCT 209-29 209	1-11/16		19	16	83	49	29	83	16	102	117	144	49	35	87	19,0	49,2	SSUC 209-29 209					
SSUCT 209-30 210-31	1-3/4		19	16	83	49	29	83	16	102	117	144	49	35	87	19,0	49,2	SSUC 209-30 210-31					
SSUCT 210-31 210	1-15/16		19	16	83	49	29	86	16	102	117	149	49	37	90	19,0	51,6	SSUC 210-30 210-31	T210	2,78			
SSUCT 211-32 211-34	2		25	19	102	64	35	95	22	130	146	171	64	38	106	22,2	55,6	SSUC 210-32 210					
SSUCT 211-34 211	2-1/8		25	19	102	64	35	95	22	130	146	171	64	38	106	22,2	55,6	SSUC 211-32 211	T211	4,17			
SSUCT 211-35 212-36	2-3/16		32	19	102	64	35	102	22	130	146	194	64	42	119	25,4	65,1	SSUC 211-35 212-36	T212	4,90			
SSUCT 212-36	2-1/4																						

* Verifique siempre el ancho de la ranura del marco k ya que puede variar el Ancho dependiendo de la marca